




**Control
Regulate
Drive**
with inverter
driven geared
motors series
EtaK2.0

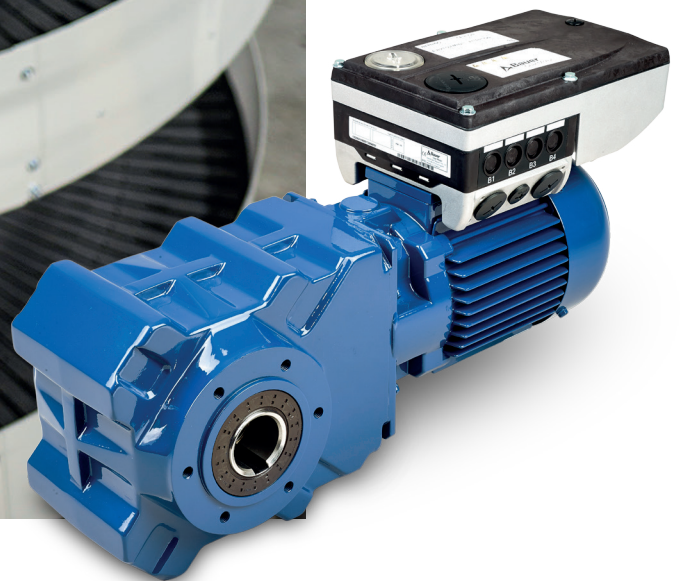

 **Bauer Gear Motor®**
Altra Industrial Motion

Efficient and ideal for decentral systems

EtaK2.0 geared motors help you cut costs in several areas: in planning and installation, in operation and in maintenance. They help you control the efficiency of your installations, protect your mechanical components and reduce mains loading. In this way EtaK2.0 geared motors make a significant contribution to energy savings and efficiency optimisation in your application.

All EtaK2.0 geared motors are a combination of helical, shaft-mounted, bevel and worm geared motors and a variable frequency drive (VFD). They give you compact drive solutions with continuously variable speed and rated motor power up to 7.5 kW, with the VFD mounted directly on the motor. Thanks to their compact design, the entire drive needs only slightly more installation space than a conventional geared motor.

EtaK2.0 geared motors are smart power components for future-oriented system designs and can easily be adapted to specific working conditions and required process speeds. They are preferably controlled using a field bus system, but they also support control through digital and analogue inputs and outputs. The VFD provides valuable additional information for system protection and monitoring.

- Employing variable speed control usually increases the efficiency of the drive system.
- A variety of control schemes have become established as optimal solutions in different application areas.
- Bauer works with experts to determine the best solution for the control tasks in the application environment for each specific application. For example, the demands in the automobile industry, the metals industry and the food processing industry are distinctly different.
- Bauer's application experts work closely with our system partners to further optimise the electromechanical drive train.



Flexibility through modular design



The Drive Unit – power unit with low diversity

- Power units are available in three models with ten power ratings
BF1: 3ph. 380–500 V, 0.37 to 1.5 kW
BF2: 3ph. 380–500 V, 2.2 to 3.0 kW
BF3: 3ph. 380–500 V, 4.0 to 7.5 kW
- Enclosure IP65



The Communication Unit– localised functionality

- Communication over CANopen, Profibus, Profinet, EtherCAT, EtherNet/IP and AS-i
- Safety functions in accordance with EN 60204 (STO, SS1)
- I/O signal processing
- Without field bus: I/O via cable glands
- With field bus: bus and two input signals via M12
- Customisable up to 8x M12
- Prefabricated M12 connectors available as accessories



The Connection Unit– flexible connection options

- Cable glands and various plug-and-socket connectors
- Brake resistor connector
- Control of spring-actuated brake



Functions and features


Control types	Suitable for asynchronous and synchronous motors
Control algorithms	- VFCplus: V/f control (linear or quadratic) - SLVC: Sensorless vector control (motor speed) - VFCplus eco: Energy-efficient V/f control
Basic functions	User-definable menu Parameter switching DC braking function Trap-and-trace S ramps for gentle acceleration PID controller Three fixed frequencies Exclusion frequencies
Engineering applications	Variable speed servo drive Switch-off positioning
Monitoring and protection	Short circuit Frame fault Overvoltage Motor phase dropout Overcurrent I ² t motor monitoring Motor overheating Mains phase dropout Protection against cyclic mains switching Motor stalling
Diagnostics	Data logger, logbook
Status indication	Readily visible LED
Diagnostic interface	Integrated For USB diagnostic adapter or keypad (hand-held terminal)
Braking	Integrated brake management - Integrated brake chopper - Braking resistor accessory module or external braking resistor
Power range	0.75 to 7.5 kW
Overload current	200% (3 s); 150% (60 s)
Wall mounting	Possible



- **Diagnostic interface**
 - For hand-held terminal
 - For PC through USB adapter
- **Potentiometer**
 - For 0–100% speed control
- Large **LED status indicator** for good visibility, even under difficult installation conditions



Hand-held terminal



- All parameter settings are stored in a **memory module** for quick transfer to a new unit in the event of service exchange.
- The memory module can also be duplicated using a copying station.
- Parameter download to memory module through USB adapter

Communication unit

The communication modules support the following functions:

- VFD control using digital and analogue signals
- VFD control using field bus systems
- Supports Safe Torque Off functionality
- Connection options for sensors and actuators
- Internal 24 V supply for sensor power (max. 100 mA)
- Connections can be made using cable glands and M12 connectors. Up to eight cable glands and/or connectors in total are possible. The individual communication units are provided with suitable connection options according to their functions.

Interfaces							
	Controller enable	Digital inputs	Digital outputs	Relay outputs	Analogue inputs	Safety STO	External 24 V DC supply
	Number	Number	Number	Number	Number	Number	Number
I/O modules							
Standard I/O	1	5	1	1	1		1
Field bus							
AS-i	1	5	1				
CANopen	1	5	1				
EtherCAT	1	5	1				1
EtherNet/IP	1	5	1				1
Profibus	1	5	1				1
Profinet	1	5	1				
Field bus with safety	1	5	1	1	1	1	1
AS-i STO	1	5	1	1	1	1	1
CANopen STO	1	5	1	1	1	1	1
EtherCAT STO	1	5	1	1	1	1	1
EtherNet/IP STO	1	5	1	1	1	1	1
Profibus STO	1	5	1	1	1	1	1
Profinet STO	1	5	1	1	1	1	1

Flexible and versatile


Without field bus




With field bus




With field bus and STO

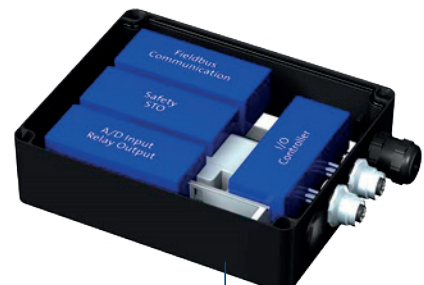

Supported field busses

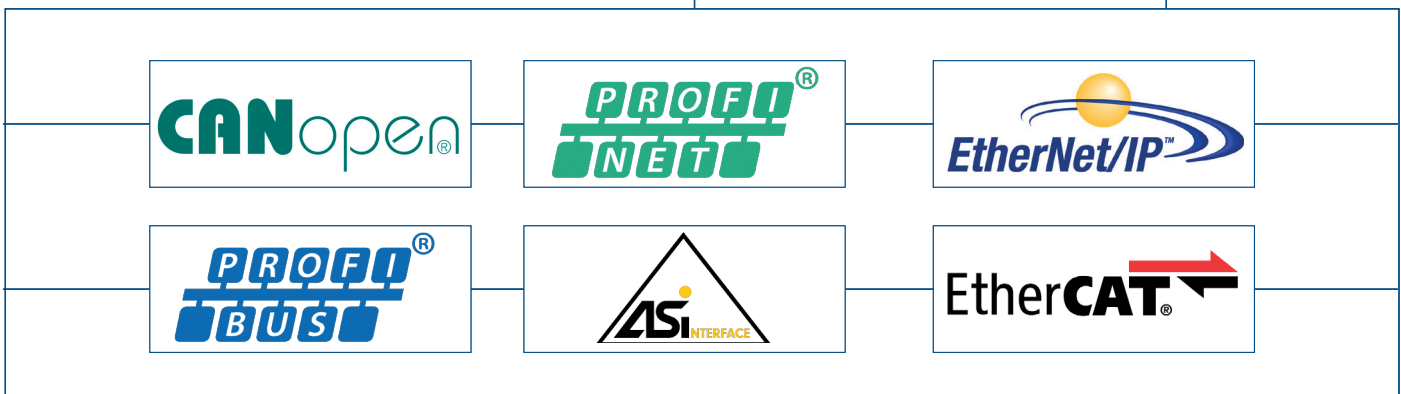



Power distribution scheme

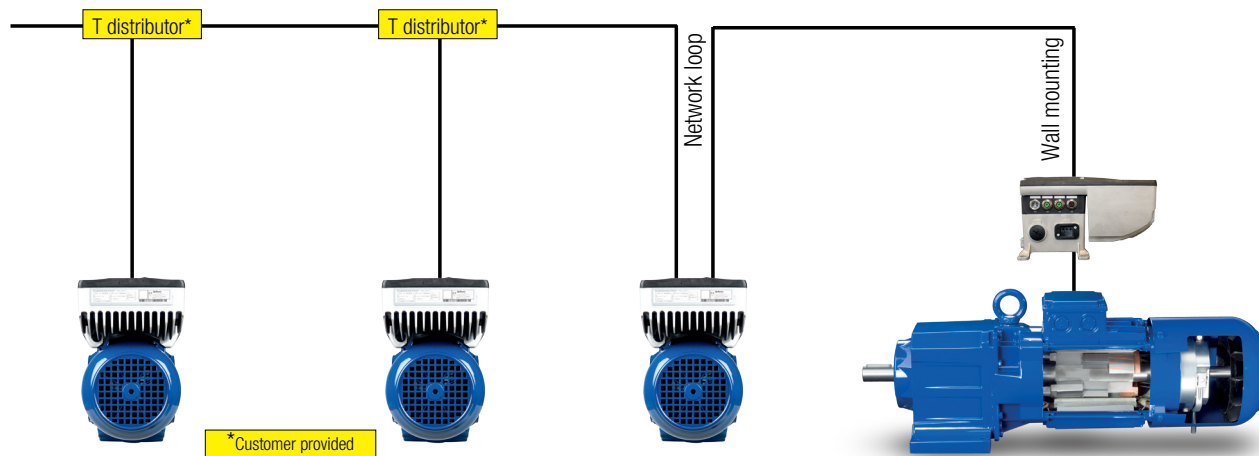

Mains connection scheme

Standard

- Up to 7.5 kW
- Mains connection through integrated QuickOn power connector
- Max. load 20 A
- For inverters up to 7.5 kW
- Insulation displacement terminals
- Faster and easier connection

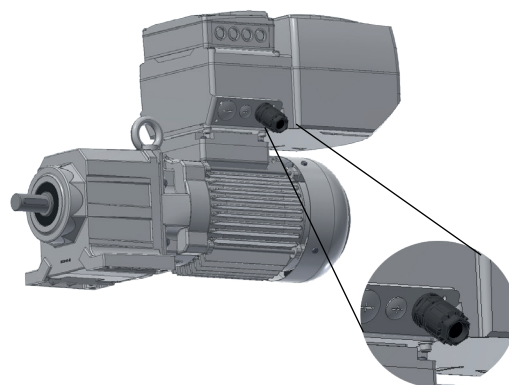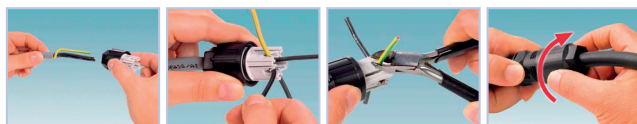


Option

- Up to 3 kW
- Mains connection through integrated M12 power connector
- Max. load 12 A
- For inverters up to 3.0 kW
- Straight and angle mating connectors available
- Pre-wired mating connectors available



Power bus – alternative connection options (special versions)

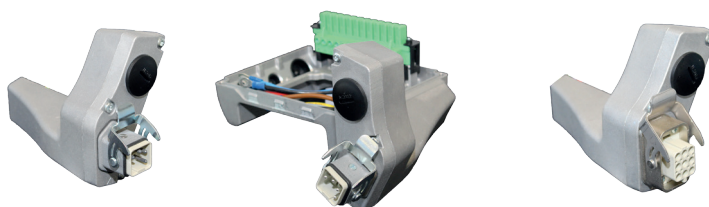

Wall mounting

Up to 3.0 kW

This wall mount option, with or without cable glands, is available for power levels up to **3.0 kW**.



4.0 to 7.5 kW


This wall mount option is available for power levels from **4.0 to 7.5 kW**.



Drive based safety

Safe Torque Off (STO)


Corresponds to EN 60204 stop category 0. Power to the drive is cut off immediately and the drive is brought to an uncontrolled stop. PL e Cat. 4 according to EN ISO 13849-1

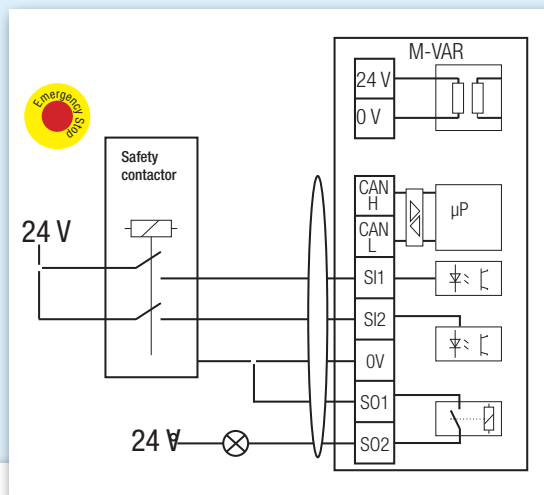

Advantages

- Mains contactor not necessary
- Fast restart
- Selective switch-off
- Communication remains active

* Additional safety contactor

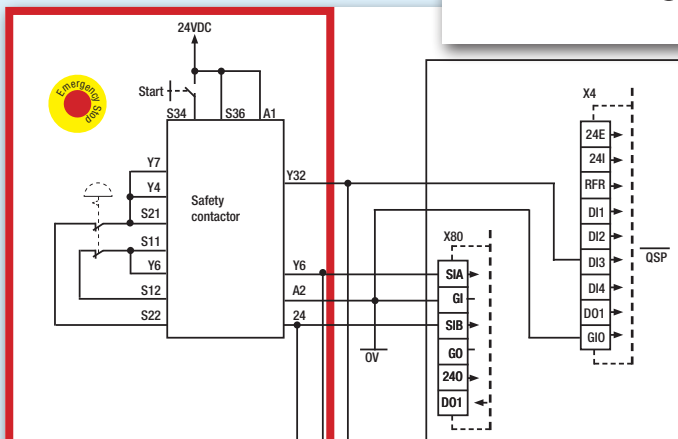

Safe Stop 1 (SS1)

Corresponds to EN 60204 stop category 1. The drive is brought to a controlled stop, and then the STO safety function is activated. PL e Cat. 4 according to EN ISO 13849-1

Compact geared motor solution

- **Adapted motor windings** matched to VFD for optimised efficiency
- **Optimised motor parameters** over the entire speed and torque range
- Motor and VFD **combinations surpass** IES 2 system efficiency class according to EN 50598-2 and IEC 61800-9-2
- **All necessary options** integrated very compactly, including safety functions

Motor combinations

Permanent magnet synchronous motors (PMSM)

P _N [kW]	Type	n _N [rpm]	P _{VFD} [kW]
0,37	S06MA4	1500	0,37
0,75	S06MA4	3000	0,75
0,75	S07LA4	1500	0,75
1,5	S07LA4	3000	1,5
0,55	S08MA4	3000	0,55
0,55	S08MA4	1500	0,55
0,75	S08MA4	3000	0,75
0,75	S08MA4	1500	0,75
1,1	S08MA4	3000	1,1
1,1	S08LA4	1500	1,1
1,5	S08MA4	3000	1,5
1,5	S08LA4	1500	1,5
1,5	S09SA4	1500	1,5
2,2	S08MA4	3000	2,2
2,2	S08LA4	3000	2,2
2,2	S09SA4	1500	2,2
2,2	S09XA4	1500	2,2
3	S08LA4	3000	3
3	S09XA4	1500	3
3	S11SA6	1500	3
4	S09SA4	3000	4
4	S11SA6	1500	4
4	S11MA6	1500	4
5,5	S09XA4	3000	5,5
5,5	S11MA6	1500	5,5
5,5	S11LA6	1500	5,5
7,5	S11SA6	3000	7,5
7,5	S11MA6	3000	7,5
7,5	S11LA6	1500	7,5



The motor combinations listed here are subject to change. Please contact our staff for more information.

Asynchronous motors (ASM)

		Base frequency 50 Hz Motor: 350V/50Hz/Y		Base frequency 87 Hz Motor: 202V/50Hz/D	
P _N 50 Hz [kW]	Type	P _{VFD} [kW]	I _N [A]	P _{VFD} [kW]	I _N [A]
0.12	DHE06LA4	0.37	1.3	0.37	1.3
0.18	DHE06LA4	0.37	1.3	0.37	1.3
0.25	DHE07LA4	0.37	1.3	0.55	1.8
0.37	DHE08MA4	0.37	1.3	0.75	2.4
0.55	DHE08LA4	0.55	1.8	1.1	3.2
0.75	DHE08XA4	0.75	2.4	1.5	3.9
1.1	DHE09LA4	1.1	3.2	2.2	5.6
1.5	DHE09XA4	1.5	3.9	3	7.3
2.2	DHE09XB4	2.2	5.6	4	9.5
3	DHE11MA4	3	7.3	5.5	13
4	DHE11LA4	4	9.5	7.5	16.5
5.5	DHE11LB4	5.5	13	-	-
7.5	DHE13LA4	7.5	16.5	-	-

The benefits at a glance

The EtaK2.0 features maximum user friendliness in operation and installation. Especially for decentralised drive solutions, it demonstrates its high efficiency in terms of space, time and energy.

Space advantages

- Integrated safety technology and field bus communication according to specific needs
- Modular structure minimises spare parts stock

Time advantages

- Plug-and-socket connectors reduce assembly and installation time – „unpack, plug in and go“
- Easy memory module exchange simplifies series commissioning and enhances availability

Energy efficiency

- VFC eco mode provides intelligent adjustment of magnetising current
- Energy savings of up to 30% possible under partial load conditions

Mechanically and electrically robust

- Suited to extremely harsh environments thanks to IP65 enclosure rating

Added benefits

- 200% overload current (3 s)
- V/f control with or without encoder
- Sensorless vector control
- Short-circuit and frame fault protection
- Direct current braking
- S ramps for gentle acceleration
- Maximum output frequency 300 Hz
- CANopen, Profibus, Profinet, EtherCAT, EtherNet/IP and AS-i
- STO safety function

A plus for decentral applications

- The EtaK2.0 meets all demands on modern, universally deployable and cost-effective motor/VFD combinations. That makes it the ideal choice for decentral tasks in intralogistics domains, such as airports and distribution centres.


EtaK2.0

Eta-K vs. EtaK2.0


Feature	Eta-K	EtaK2.0
Power range	0.55 kW - 7.5 kW	0.37 kW - 7.5 kW
PMSM enabled	✗	✓
Sensorless vector control	✗	✓
V/f control	✓	✓
Digital inputs	4	5
Digital outputs	1	1 - 2
Analogue in	1	1
Field bus systems	RS 485 Profibus	Profinet EtherCAT CANOpen Profibus AS-i EtherNet/IP
Safety options	✗	✓
Brake chopper	✗	✓
Brake resistor	✗	✓
Operating Temperature	-10°C to +40°C	-30°C to +55°C
Overload	160% 60 s	200% 3 s; 150% 60 s
Control of electromechanical brake	External	Optional

Contour comparison

D08 asynchronous motor with 0.55 kW inverter ETA-K / EtaK2.0

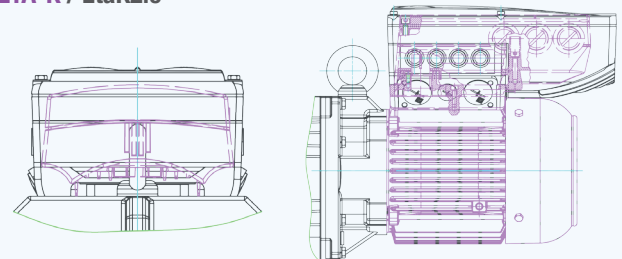


D09 asynchronous motor with 1.5 kW inverter ETA-K / EtaK2.0

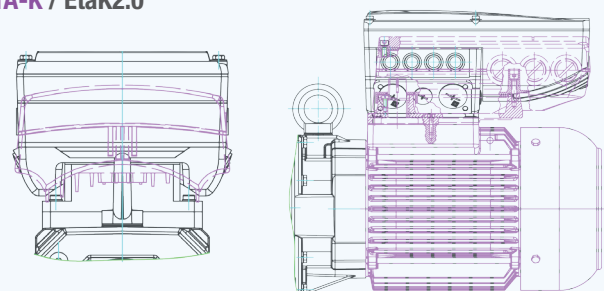

ACCESSORIES

Encoder




Holding brake




Hand-held terminal



Brake resistor




Wall mounting




TRANSMISSION COMPONENTS



BF series




BG series



BK series



BS series



BM series

GEAR TECHNOLOGY


CONTROL/ COMMUNICATION



Field bus



Digital / Analogue I/O

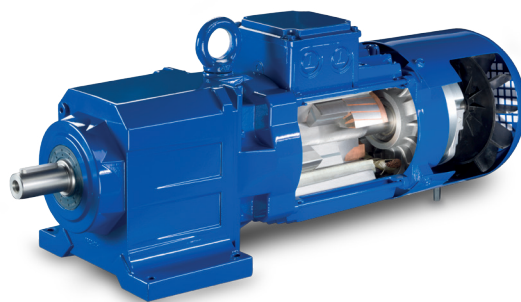

Permanent-magnet motors



Asynchronous motors

MOTOR & CONTROL ELECTRONICS

Bauer Gear Motor Facilities

Europe

Germany

Eberhard-Bauer-Strasse 37
73734 Esslingen - Germany
+49 711 3518 0

Slovakia

Tovarenská 49
953 01 Zlate Moravce - Slovakia
+421 37 6926100

United Kingdom

Nat Lane Business Park
Winsford, Cheshire
CW7 3BS - United Kingdom
+44 1606 868600

North America

Middlesex, NJ

T476 Union Ave.
Middlesex, NJ 08846-1968 - USA
+1 732 469 8770

Charlotte, NC

701 Carrier Drive
Charlotte, NC 28216 - USA
+1 800 825 6544

Asia Pacific

China

18 Huan Zhen Road Dabo
Industrial Zone - BoGoang Village
ShaJing Town - BaoAn District
Guangdong Province
518104 Shenzhen City - China
+86 755 27246308

Customer Service

Benelux

Brussel (Anderlecht)
+32 2 5295941

Finland

01510 Vantaa
+358 207 189700

France

Brussel (Anderlecht)
+32 2 5295941

Italy

Grisignano di Zocco (VI)
+39 0444 414392

Russia

Volokolamskoye sh., 142, bldg 6
Business Center „Irbis“
125464 Moscow - Russia
+7 495 6420468

The Brands of Altra Industrial Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Wood's
www.tbwoods.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Electric Clutches & Brakes

Inertia Dynamics
www.idicb.com

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Linear Products

Warner Linear
www.warnerlinear.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Heavy Duty Clutches & Brakes

Industrial Clutch
www.indclutch.com

Twiflex Limited
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Belted Drives

TB Wood's
www.tbwoods.com

Gearing

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber Clutch
www.stieberclutch.com

Bauer assumes no liability or responsibility for misprints and errors in catalogues, brochures and other printed documentation. Bauer reserves the right to make changes to products without prior notice, including to products that have already been ordered, unless contractual technical specifications are affected by such changes. All trademarks in these publications are the sole and exclusive property of the relevant companies. Bauer and the Bauer logo are trademarks of Bauer Gear Motor GmbH. Images are only illustrative and may differ from the delivered product depending on the configuration ordered. Technical data and specifications are precise at the time of issue and may be subject to change. All rights reserved.

Images: Fotolia, Adobe Stock, Altra and Bauer Archive



www.bauergears.com

Eberhard-Bauer-Straße 37
73734 Esslingen - Germany
Tel.: +49 711 3518-0
Fax: +49 711 3518-381